



Polygraphic International bv
Groningenhaven 28
3433 PE NIEUWEGEIN
Netherlands

Your notice of
 24-04-2025

Your reference

Date
 28-05-2025

Analysis Report 25.02327.01

Required tests :

ISO 6330 (2021)

ISO 15025 (2016)

ISO 15797 (2018)

Washing and drying

Method of test for limited flame spread: Procedure A – Surface ignition

Industrial washing and drying


Sample id	Information given by the client	Date of receipt
T2508862	PI PRO FR - Polygraphic Flame Retardant Transfer 10x10cm on fabric AET2 from Sioen - Gewebe 98% Polyester, 2% AST, Beschichtung PU FR, Gestrick 55% Modacryl, 37% Baumwolle, 8% Aramide - color Marineblau	24-04-2025

Hilde Rubben
 Order responsible

This report may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel.
 The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.
 In assessing compliance with the specifications, we did not take into account the uncertainty on the test results.



T2508862
 PI PRO FR - Polygraphic Flame Retardant
 Transfer 10x10cm on fabric AET2 from
 Sioen - Gewebe 98% Polyester, 2% AST,
 Beschichtung PU FR, Gestrick 55%
 Modacryl, 37% Baumwolle, 8% Aramide -
 color Marineblau

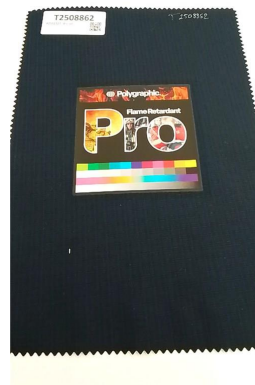



Reference: T2508862 - PI PRO FR - Polygraphic Flame Retardant Transfer 10x10cm
 on fabric AET2 from Sioen - Gewebe 98% Polyester, 2% AST,
 Beschichtung PU FR, Gestrick 55% Modacryl, 37% Baumwolle, 8%
 Aramide - color Marineblau

Washing and drying

Date of ending the test	07-05-2025
Standard used	ISO 6330 (2021)
Deviation from the standard	-
Conditioning	20°C, relative humidity 65%
Apparatus	Wascator FOM 71 (type A)
Used detergent	ECE detergent (Type 3)
Washing method and temperature	4M- 40°C (2021)
Drying method	F = tumble dry (•) after each washingcycle (2021)
Number of washing cycles	5
Mass of the test specimens	78g
Mass of the ballast	The washing machine is filled with ballast to achieve 2 kg in total
Remark	Washing always occurs with a ballast type III 100% PES regardless of the composition of the fabric.

Sample generated: T2508862_01d



Reference: T2508862_01d - PI PRO FR - Polygraphic Flame Retardant Transfer
 10x10cm on fabric AET2 from Sioen - Gewebe 98% Polyester, 2% AST,
 Beschichtung PU FR, Gestrick 55% Modacryl, 37% Baumwolle, 8%
 Aramide - color Marineblau

Method of test for limited flame spread: Procedure A – Surface ignition

Date of ending the test 27-05-2025
 Standard used ISO 15025 (2016)
 Product standard ISO 11612 (2015)
 Deviation from the standard -
 Conditioning 20°C, relative humidity 65%
 Testing atmosphere 21°C, relative humidity 61%
 Flame application In contact with logo

	1	2	3
Afterflame time (s)	0	0	0
Afterglow time in the undamaged area (s)	0	0	0
Molten debris	no	no	no
Flaming debris (= ignition of the filter paper)	no	no	no
Flame on edge	no	no	no
Hole formed	no	no	no



T2508862_01d

PI PRO FR - Polygraphic Flame Retardant Transfer 10x10cm on fabric AET2 from Sioen - Gewebe 98% Polyester, 2% AST, Beschichtung PU FR, Gestrick 55% Modacryl, 37% Baumwolle, 8% Aramide - color Marineblau

From sample T2508862 and the following procedure (PI PRO FR - Polygraphic Flame Retardant Transfer 10x10cm on fabric AET2 from Sioen - Gewebe 98% Polyester, 2% AST, Beschichtung PU FR, Gestrick 55% Modacryl, 37% Baumwolle, 8% Aramide - color Marineblau)

Washing and drying

Date of ending the test	07-05-2025
Standard used	ISO 6330 (2021)
Washing method and temperature	4M- 40°C (2021)
Drying method	F = tumble dry (•) after each washingcycle (2021)
Number of washing cycles	5

Sample history