



Polygraphic International bv
Groningenhaven 28
3433 PE NIEUWEGEIN
Netherlands

Your notice of
 22-07-2025

Your reference

Date
 01-09-2025

Analysis Report 25.04035.05

Required tests :
ISO 6330 (2021)
ISO 15025 (2016)

Washing and drying
Method of test for limited flame spread: Procedure A – Surface ignition

Sample id	Information given by the client	Date of receipt
T2514757	heatseal emblem ref. PI PRO FR - 10x10cm on fabric APX8 from SIOEN - Fabric 98% PES (300D), 2% Carbon, Coating 100% PU FR - 235 g/m ² - color: light yellow	22-07-2025



Pieter-Jan Slechten
 Order responsible


This report may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel.
 The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.
 In assessing compliance with the specifications, we did not take into account the uncertainty on the test results.



Samples

T2514757

heatseal emblem ref. PI PRO FR - 10x10cm
 on fabric APX8 from SIOEN - Fabric 98%
 PES (300D), 2% Carbon, Coating 100% PU
 FR - 235 g/m² - color: light yellow

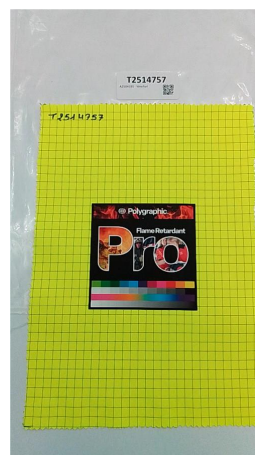



Reference: T2514757 - heatseal emblem ref. PI PRO FR - 10x10cm on fabric APX8
 from SIOEN - Fabric 98% PES (300D), 2% Carbon, Coating 100% PU
 FR - 235 g/m² - color: light yellow

Washing and drying

Date of ending the test	30-07-2025
Standard used	ISO 6330 (2021)
Deviation from the standard	-
Conditioning	20°C, relative humidity 65%
Apparatus	Wascator FOM 71 (type A)
Used detergent	ECE detergent (Type 3)
Washing method and temperature	4M- 40°C (2021)
Drying method	C = Flat dry (2021)
Number of washing cycles	5
Mass of the test specimens	66g
Mass of the ballast	The washing machine is filled with ballast to achieve 2 kg in total
Remark	Washing always occurs with a ballast type III 100% PES regardless of the composition of the fabric.

Sample generated: T2514757_01d



Reference: T2514757_01d - heatseal emblem ref. PI PRO FR - 10x10cm on fabric APX8 from SIOEN - Fabric 98% PES (300D), 2% Carbon, Coating 100% PU FR - 235 g/m² - color: light yellow

Method of test for limited flame spread: Procedure A – Surface ignition

Date of ending the test 29-08-2025
Standard used ISO 15025 (2016)
Product standard ISO 11612 (2015)

Deviation from the standard -

Conditioning 20°C, relative humidity 65%
Testing atmosphere 24°C, relative humidity 45%

Flame application Emblem

	1	2	3
Afterflame time (s)	0	0	0
Afterglow time in the undamaged area (s)	0	0	0
Molten debris	no	no	no
Flaming debris (= ignition of the filter paper)	no	no	no
Flame on edge	no	no	no
Hole formed	yes	yes	yes



Sample history

T2514757_01d

heatseal emblem ref. PI PRO FR - 10x10cm
on fabric APX8 from SIOEN - Fabric 98%
PES (300D), 2% Carbon, Coating 100% PU
FR - 235 g/m² - color: light yellow

From sample T2514757 and the following procedure (heatseal emblem ref. PI PRO FR -
 10x10cm on fabric APX8 from SIOEN - Fabric 98% PES (300D), 2% Carbon, Coating 100%
 PU FR - 235 g/m² - color: light yellow)

Washing and drying

Date of ending the test	30-07-2025
Standard used	ISO 6330 (2021)
Washing method and temperature	4M- 40°C (2021)
Drying method	C = Flat dry (2021)
Number of washing cycles	5